



## FV SERIES STAINLESS STEEL HOUSINGS

- V-Band Closure for Quick Filter Change
  - Accepts DOE and 222 Style
  - Heavy Duty 304 or 316 Stainless Steel For Durability Available
- \*\* LEGS ARE STANDARD

## FV SERIES STAINLESS STEEL HOUSINGS

LIQUATEC FV SERIES STAINLESS STEEL FILTER HOUSINGS ideal for most industrial/commercial applications. With our welded leg design as a standard, not "optional" feature, eliminates the added expense to your application. Commonly used for pre-filtration to REVERSE OSMOSIS (RO) systems, Farms, Food Service, Car Washes, Agriculture and many other uses.



LIQUATEC FV SERIES STAINLESS STEEL FILTER HOUSINGS use a high grade 304 stainless steel as standard not "L", which is a lower grade stainless steel like most other manufactures. Our housings easily accept **Liquatec's SDF, LX, DP and AR Series Cartridges**. With our wide range of models, options, and filter cartridges, these units can easily meet most any requirement.



**Liquatec**  
corporation



## FV SERIES STAINLESS STEEL HOUSINGS

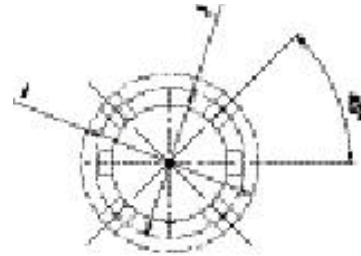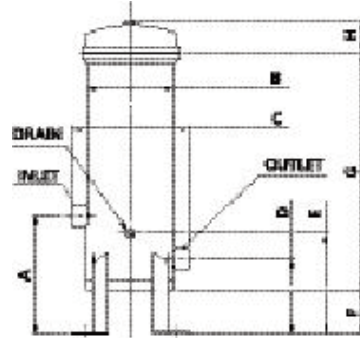

### MATERIALS OF CONSTRUCTION

- HOUSING 304 AND 316 STAINLESS STEEL
- CLOSURE STAINLESS STEEL
- O-RINGS EPDM (FDA GRADE)
- MAX. PRES/TEMP 150 PSI @ 200°F

### OPTIONAL FEATURES


1. Electro Polishing
2. Gauge Ports
3. Gauges Installed
4. 316 Stainless Steel
5. Filters DOE and 222 Installed

### 7 ROUND 304 STAINLESS STEEL HOUSING

MODEL	A	B	C	D	E	F	G	H	I	J
FV-710-2	13.4	10	13.3	8.5	11.4	5	16.53	3.7	16.85	14.33
FV-720-2	13.4	10	13.3	8.5	11.4	5	26.53	3.7	16.85	14.33
FV-730-2	13.4	10	13.3	8.5	11.4	5	36.53	3.7	16.85	14.33
FV-740-2	13.4	10	13.3	8.5	11.4	5	46.53	3.7	16.85	14.33

### 7 ROUND 316 STAINLESS STEEL HOUSING

MODEL	A	B	C	D	E	F	G	H	I	J
FVS-710-213.4	10	13.3	8.5	11.4	5	16.53	3.7	16.85	14.33	
FVS-720-213.4	10	13.3	8.5	11.4	5	26.53	3.7	16.85	14.33	
FVS-730-213.4	10	13.3	8.5	11.4	5	36.53	3.7	16.85	14.33	
FVS-740-213.4	10	13.3	8.5	11.4	5	46.53	3.7	16.85	14.33	

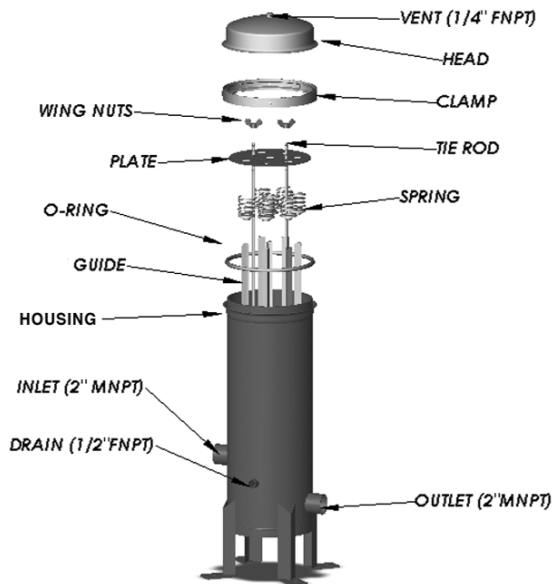

DISTRIBUTED BY: